



**FRESENIUS
KABI**
caring for life



CATSmart[®] Continuous Autotransfusion System

Brilliantly Simple Vacuum Solutions

Powerful-Customizable-Modular-Convenient

The CATSmart vacuum features two separate modes of operation:

- Intelligent Mode: Automatically powers down when not in use, pre-programmable and adjustable¹
- Manual Mode: Continuous vacuum pressure, pre-programmable and adjustable¹

Modular design

Customer configurable default settings¹

0 to -300 mmHg in increments of 25 mmHg¹

Touch screen control

Two modes of operation

CATSmart

Vacuum Pump and Accessories

CATSmart Hydrophobic Antibacterial and Antiviral filter sets

- Designed to protect CATSmart vacuum pumps from moisture and microorganisms²
- Filter efficiency equal to or greater than 99.9% against bacteria and viruses²
- Simple connection to vacuum pump
- Combination package offering
- Single use



ATV-F140C Disposable Combination pack


- One ATV-F140
- One ATV-70
- One smoke filter adapter



Touch Screen Control



On-board Modular Design

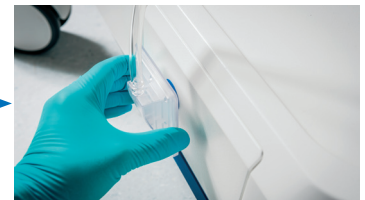

CATSmart vacuum line with integrated Hydrophobic filter

List Number	Description	Quantity
9005851	CATSmart Vacuum Weight: 4.1 kg/9.04 lbs ¹	1 Each
9008554	ATV-F140C Combination Pack: (1) 140cm vacuum line with bonded hydrophobic filter, (1) 70cm ATV vacuum line and (1) smoke filter adapter	12/Case
9108554	ATV Vacuum Line (70 cm)	15/Case
6780881	Bacterial Filter	100/Case
M679011	Smoke Filter	1 Each
M649951	Overflow Protector	1 Each

Please visit www.catsmart.us

Refer to the operators manual or instructions for use for a full list of warnings and precautions associated with the device.

¹ CATSmart Ops Manual edition OP_11_09_19_USA

² ATVF140C Vacuum Line IFU N3314701/1 11-2017

CATSmart is a registered trademark of Fresenius Kabi AG.

Copyright © 2020 Fresenius Kabi AG. All rights reserved.